


Standard Guide Wire

Guide Wires

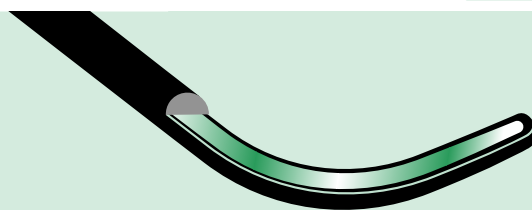

Length < 180 cm

Nitinol Hydrophilic Guide Wires covered with polyurethane and hydrophilic coating for an absolute maneuverability and absence of friction.

- Extra flexible and non traumatic tapered tip
- Extra hydrophilic thanks to the exclusive “M” polymer coating
- Super elastic alloy core in Nitinol
- One-piece construction for a better push and torque transmission

Specifications

Code number	Diameter	Length	Flexible length	Distal curve
RF-GS18153M	0.018" / 0.46 mm	150 cm	30 mm	Straight
RF-GA18153M	0.018" / 0.46 mm	150 cm	30 mm	Angled
RF-GS18183M	0.018" / 0.46 mm	180 cm	30 mm	Straight
RF-GA18183M	0.018" / 0.46 mm	180 cm	30 mm	Angled
RF-GS25123M	0.025" / 0.64 mm	120 cm	30 mm	Straight
RF-GA25123M	0.025" / 0.64 mm	120 cm	30 mm	Angled
RF-GS25153M	0.025" / 0.64 mm	150 cm	30 mm	Straight
RF-GA25153M	0.025" / 0.64 mm	150 cm	30 mm	Angled
RF-GS25183M	0.025" / 0.64 mm	180 cm	30 mm	Straight
RF-GA25183M	0.025" / 0.64 mm	180 cm	30 mm	Angled
RF-GS32123M	0.032" / 0.81 mm	120 cm	30 mm	Straight
RF-GA32123M	0.032" / 0.81 mm	120 cm	30 mm	Angled
RF-GS32153M	0.032" / 0.81 mm	150 cm	30 mm	Straight
RF-GA32153M	0.032" / 0.81 mm	150 cm	30 mm	Angled
RF-GS32183M	0.032" / 0.81 mm	180 cm	30 mm	Straight
RF-GA32183M	0.032" / 0.81 mm	180 cm	30 mm	Angled
RF-GA35053M	0.035" / 0.89 mm	50 cm	30 mm	Angled
RF-GA35083M	0.035" / 0.89 mm	80 cm	30 mm	Angled
RF-GS35123M	0.035" / 0.89 mm	120 cm	30 mm	Straight
RF-GA35123M	0.035" / 0.89 mm	120 cm	30 mm	Angled
RF-GS35151M	0.035" / 0.89 mm	150 cm	10 mm	Straight
RF*GS35153M	0.035" / 0.89 mm	150 cm	30 mm	Straight
RF-GS35155M	0.035" / 0.89 mm	150 cm	50 mm	Straight
RF-GS35158M	0.035" / 0.89 mm	150 cm	80 mm	Straight
RF-GA35151M	0.035" / 0.89 mm	150 cm	10 mm	Angled
RF*GA35153M	0.035" / 0.89 mm	150 cm	30 mm	Angled
RF-GA35155M	0.035" / 0.89 mm	150 cm	50 mm	Angled
RF-GA35158M	0.035" / 0.89 mm	150 cm	80 mm	Angled
RF*GR35183M	0.035" / 0.89 mm	180 cm	30 mm	J Angled (1.5 mm)
RF*GB35153M	0.035" / 0.89 mm	150 cm	30 mm	J Angled (3 mm)
RF-GS35181M	0.035" / 0.89 mm	180 cm	10 mm	Straight
RF-GS35183M	0.035" / 0.89 mm	180 cm	30 mm	Straight
RF-GA35181M	0.035" / 0.89 mm	180 cm	10 mm	Angled
RF*GA35183M	0.035" / 0.89 mm	180 cm	30 mm	Angled
RF*GE35185M	0.035" / 0.89 mm	180 cm	50 mm	Double Angulation (Bolia)
RF*GE35188M	0.035" / 0.89 mm	180 cm	80 mm	Double Angulation (Bolia)
RF-GS38151M	0.038" / 0.97 mm	150 cm	10 mm	Straight
RF-GS38153M	0.038" / 0.97 mm	150 cm	30 mm	Straight
RF-GA38151M	0.038" / 0.97 mm	150 cm	10 mm	Angled
RF*GA38153M	0.038" / 0.97 mm	150 cm	30 mm	Angled
RF-GS38183M	0.038" / 0.97 mm	180 cm	30 mm	Straight
RF-GA38183M	0.038" / 0.97 mm	180 cm	30 mm	Angled

Other code numbers are available on special demand. For any further information, please contact your Terumo local representative

Unit per box: 5

Long Standard Exchange Guide Wire

Guide Wires



Length > 220 cm

Nitinol Hydrophilic Guide Wires covered with polyurethane and hydrophilic coating for an absolute maneuverability and absence of friction.

- Extra flexible and non traumatic tapered tip
- Extra hydrophilic thanks to the exclusive “M” polymer coating
- Super elastic alloy core in Nitinol
- One-piece construction for a better push and torque transmission

Specifications


Code number	Outer diameter	Length	Flexible length	Distal curve
RF-GA18223M	0.018" / 0.46 mm	220 cm	30 mm	Angled
RF-GA18263M	0.018" / 0.46 mm	260 cm	30 mm	Angled
RF-GS18263M	0.018" / 0.46 mm	260 cm	30 mm	Straight
RF-GS25263M	0.025" / 0.64mm	260 cm	30 mm	Straight
RF-GA25263M	0.025" / 0.64mm	260 cm	30 mm	Angled
RF-GS32263M	0.032" / 0.81 mm	260 cm	30 mm	Straight
RF-GA32263M	0.032" / 0.81 mm	260 cm	30 mm	Angled
RF-GS35223M	0.035" / 0.89 mm	220 cm	30 mm	Straight
RF-GA35223M	0.035" / 0.89 mm	220 cm	30 mm	Angled
RF-GS35261M	0.035" / 0.89 mm	260 cm	10 mm	Straight
RF-GS35263M	0.035" / 0.89 mm	260 cm	30 mm	Straight
RF-GA35261M	0.035" / 0.89 mm	260 cm	10 mm	Angled
RF*GA35263M	0.035" / 0.89 mm	260 cm	30 mm	Angled
RF-GA35303M	0.035" / 0.89 mm	300 cm	30 mm	Angled
RF-GA38223M	0.038" / 0.97 mm	220 cm	30 mm	Angled
RF-GS38263M	0.038" / 0.97 mm	260 cm	30 mm	Straight
RF-GA38263M	0.038" / 0.97 mm	260 cm	30 mm	Angled

Other code numbers are available on special demand. For any further information, please contact your Terumo local representative

Unit per box: 5

Stiff Guide Wire

Guide Wires

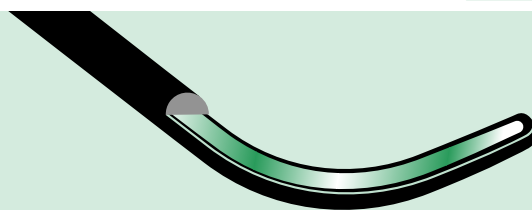

Stiff Nitinol Hydrophilic Guide Wires with excellent torque control and shape memory as well as higher stiffness and resistance.

- Excellent torque control and superior stiffness with reinforced super elastic metallic core
- Superior smoothness and safety with “M” coating and one-piece construction
- Easy to insert due to its round and flexible tip
- Smooth surface to prevent thrombus formation
- Internal radiopaque structure

Specifications


Code number	Diameter	Length	Flexible length	Distal curve
RF-PA18153M	0.020" / 0.51 mm	150 cm	30 mm	Angled
RF-PA18263M	0.020" / 0.51 mm	260 cm	30 mm	Angled
RF-PS25153M	0.025" / 0.64 mm	150 cm	30 mm	Straight
RF-PA25153M	0.025" / 0.64 mm	150 cm	30 mm	Angled
RF-PA25183M	0.025" / 0.64 mm	180 cm	30 mm	Angled
RF-PS25263M	0.025" / 0.64 mm	260 cm	30 mm	Straight
RF-PA25263M	0.025" / 0.64 mm	260 cm	30 mm	Angled
RF-PS35083M	0.035" / 0.89 mm	80 cm	30 mm	Straight
RF-PA35083M	0.035" / 0.89 mm	80 cm	30 mm	Angled
RF-PS35153M	0.035" / 0.89 mm	150 cm	30 mm	Straight
RF-PA35151M	0.035" / 0.89 mm	150 cm	10 mm	Angled
RF*PA35153M	0.035" / 0.89 mm	150 cm	30 mm	Angled
RF-PS35183M	0.035" / 0.89 mm	180 cm	30 mm	Straight
RF*PA35183M	0.035" / 0.89 mm	180 cm	30 mm	Angled
RF*HR35183M	0.035" / 0.89 mm	180 cm	30 mm	J Angled (1.5 mm)
RF*HN35183M	0.035" / 0.89 mm	180 cm	30 mm	J curve
RF-PS35263M	0.035" / 0.89 mm	260 cm	30 mm	Straight
RF-PA35263M	0.035" / 0.89 mm	260 cm	30 mm	Angled
RF-PS38153M	0.038" / 0.97 mm	150 cm	30 mm	Straight
RF-PA38153M	0.038" / 0.97 mm	150 cm	30 mm	Angled
RF-PS38183M	0.038" / 0.97 mm	180 cm	30 mm	Straight
RF-PA38263M	0.038" / 0.97 mm	260 cm	30 mm	Angled

Other code numbers are available on special demand. For any further information, please contact your Terumo local representative

Unit per box: 5

Shapeable Guide Wire

Guide Wires

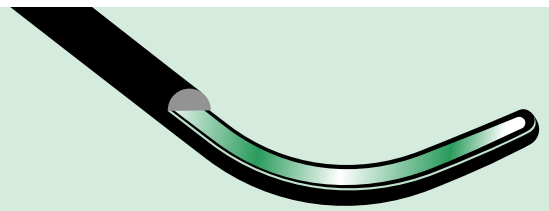

Nitinol Hydrophilic Guide Wires with high torque control and shapeable tip for special sites particularly difficult to reach.

- Tapered pre-formable tip to reach difficult access sites
- Hydrophilic “M” Coating and one-piece construction for superior sliding and easy control
- Super elastic metallic core made of Nitinol for an excellent torque control
- Smooth surface to prevent thrombus formation
- Internal radiopaque structure

Specifications


Code number	Diameter	Length	Flexible Length	Distal curve
RE*GL35153M	0.035" / 0.89 mm	150 cm	30 mm	Straight
RE*GK35153M	0.035" / 0.89 mm	150 cm	30 mm	Angled
RE*GL35183M	0.035" / 0.89 mm	180 cm	30 mm	Straight
RE*GK35183M	0.035" / 0.89 mm	180 cm	30 mm	Angled

Other code numbers are available on special demand. For any further information, please contact your Terumo local representative

Unit per box: 5

Endoscopic Guide Wire

Guide Wires

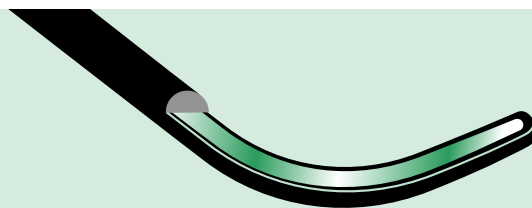

Standard and Stiff Nitinol Hydrophilic Guide Wires for endoscopic purposes with superior torque control, excellent sliding and one-piece construction.

- Hydrophilic “M” coating for superior sliding and one-piece construction for better navigability
- Excellent torque control due to a super elastic metallic core made of Nitinol
- Smooth surface to prevent thrombus formation
- Internal radiopacity
- Flexible and rounded tip for non traumatic access

Specifications

Code number	Type	Diameter	Length	Flexible length	Distal curve
RF-GS32403M	Standard	0.032" / 0.81 mm	400 cm	30 mm	Straight
RF-GA32403M	Standard	0.032" / 0.81 mm	400 cm	30 mm	Angled
RF-GS35403M	Standard	0.035" / 0.89 mm	400 cm	30 mm	Straight
RF-GA35403M	Standard	0.035" / 0.89 mm	400 cm	30 mm	Angled
RF-GS35453M	Standard	0.035" / 0.89 mm	450 cm	30 mm	Straight
RF-GA35453M	Standard	0.035" / 0.89 mm	450 cm	30 mm	Angled
RF-PS18453M	Stiff	0.020" / 0.51 mm	450 cm	30 mm	Straight
RF-PA18453M	Stiff	0.020" / 0.51 mm	450 cm	30 mm	Angled
RF-PS25453M	Stiff	0.025" / 0.64 mm	450 cm	30 mm	Straight
RF-PA25453M	Stiff	0.025" / 0.64 mm	450 cm	30 mm	Angled
RF-PS35403M	Stiff	0.035" / 0.89 mm	400 cm	30 mm	Straight
RF-PA35403M	Stiff	0.035" / 0.89 mm	400 cm	30 mm	Angled
RF-PS35453M	Stiff	0.035" / 0.89 mm	450 cm	30 mm	Straight

Other code numbers are available on special demand. For any further information, please contact your Terumo local representative

Unit per box: 5

Gold Tip for Micro Vessel Guide Wire

Guide Wires



Nitinol Hydrophilic Guide Wires with small diameter, high torque control and highly visible distal gold marker tip for micro vessels access.

- Small diameters (0.011" / 0.25 mm, 0.016" / 0.41 mm and 0.018" / 0.46 mm) specially adapted for micro vessels access
- Hydrophilic "M" Coating for superior sliding
- One-piece construction for navigability
- High visibility of the tip due to the distal gold marker
- Highly flexible for an easy access to small and distal micro vessels

Specifications


Code number	Diameter	Length	Flexible length	Distal curve	Distal marker
RF*RA10188TM	0.011" / 0.25 mm	180 cm	80 mm	Angled 45°	Gold marker
RF*RB10188TM	0.011" / 0.25 mm	180 cm	80 mm	Angled 70°	Gold marker
RF*RA16188TM	0.016" / 0.41 mm	180 cm	80 mm	Angled 45°	Gold marker
RF*RB16188TM	0.016" / 0.41 mm	180 cm	80 mm	Angled 70°	Gold marker
RF*RB18188TM	0.018" / 0.46 mm	180 cm	80 mm	Angled 70°	Gold marker

Other code numbers are available on special demand. For any further information, please contact your Terumo local representative

Unit per box: 1

GT Hydrophilic Microguide Wire

Microguide Wires

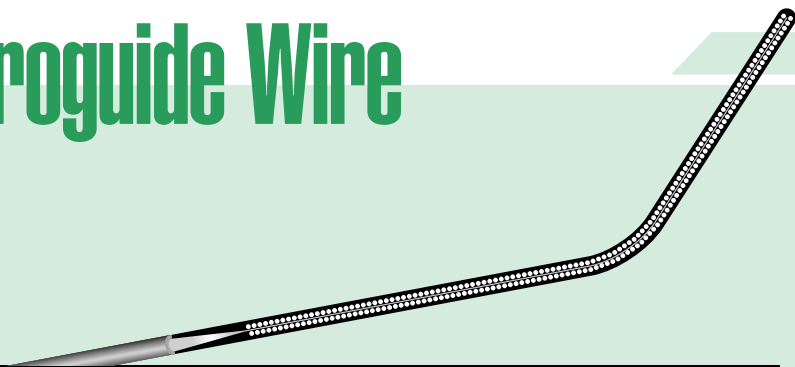

Superselective hydrophilic Nitinol Microguide Wires for Peripheral and Cerebral procedures with excellent navigability in distal and tortuous vessels.

- Non deformable and one-piece structure for an excellent pushability and torque control
- Non traumatic for vessel walls due to its polyurethane smooth surface and its hydrophilic coating
- Diameters of 0.012" / 0.31 mm or 0.016" / 0.41 mm with distal pre-shaped curves for superselective access in distal and tortuous vessels
- Distal marker made of a gold coil for a high visibility under fluoroscopy

Specifications

Code number	Outer diameter	Length	Flexible length	Distal curve	Distal marker
RG*GA1218SM	0.012" / 0.31 mm	180 cm	25 cm	Angled 45°	2 cm Gold coil
RG*GE1218SM	0.012" / 0.31 mm	180 cm	25 cm	Angled 90° x 4 mm	2 cm Gold coil
RG*GE1218SLM	0.012" / 0.31 mm	180 cm	25 cm	Angled 90° x 6 mm	2 cm Gold coil
RG*GJ1218SM	0.012" / 0.31 mm	180 cm	25 cm	Angled 1.5 mm J curve	2 cm Gold coil
RG*GW1218SM	0.012" / 0.31 mm	180 cm	25 cm	Double Angled 90°+150°	2 cm Gold coil
RG*GA1618SM	0.016" / 0.41 mm	180 cm	25 cm	Angled 45°	2 cm Gold coil
RG*GA1618FM	0.016" / 0.41 mm	180 cm	35 cm	Angled 45°	2 cm Gold coil
RG*GE1618FM	0.016" / 0.41 mm	180 cm	35 cm	Angled 90° x 4 mm	2 cm Gold coil
RG*GW1618FM	0.016" / 0.41 mm	180 cm	35 cm	Double Angled 90°+150°	2 cm Gold coil

Unit per box: 1